



# TR TRAVELER

## Self-propelled sprinkler

When you can not have underground irrigation, have it above ground !

### APPLICATIONS

The Rain Bird TR Series Traveler is designed to provide an economical solution in situations where supplementary irrigation is required or where underground watering systems are either too costly or impractical. It is ideal for athletic fields, parks and other large turf areas

### FEATURES

- Shipped less Sprinkler with 3/4" female Sprinkler connection
- Enclosed drive gear mechanism
- Precise speed adjustments independent of flow at nozzle
- Automatic shut-down at end of path
- Simple set-up and operation
- Maintenance-free turbine and transmission
- Three year trade warranty
- Built-in pressure gauge
- Simple, durable design
- Shipped less sprinkler
- Shipped less cover

### SPECIFICATIONS

Path distance: up to 90 m or 135 m (depending on model selected)  
 Speed: adjustable from 9,0 to 23,5 m/hour  
 3/4" (20/27) BSP female threaded inlet for hose  
 3/4" (20/27) BSP female threaded outlet for sprinkler

### WITH SPRINKLER MODEL 35A-PJDA-TNT

Radius: up to 15,6 m  
 Maximum coverage of up to 166,2 m by 31,2 m per lap  
 Pressure: 2,1 to 4,1 bar  
 Flow: 0,89 to 1,77 m<sup>3</sup>/h

### PERFORMANCE

#### 65PJ-TNT

Nozzles	bar	m	m <sup>3</sup> /h
16	4,0	17,4	2,43
	4,5	18,0	2,59
	5,0	18,6	2,73
	5,5	19,2	2,86






### WITH SPRINKLER MODEL 65PJ-TNT

Radius: up to 19,2 m  
 Maximum coverage of up to 173,4 m by 38,4 m per lap  
 Pressure: 4,0 to 5,5 bar  
 Flow: 2,43 to 2,86 m<sup>3</sup>/h

### MODELS

TR-4-90: Four wheels, 90 meter cable  
 TR-4-135: Four wheels, 135 meter cable  
 Cover

Note: Shown with optional cover

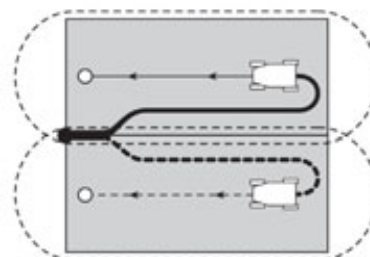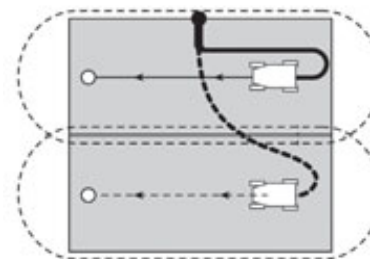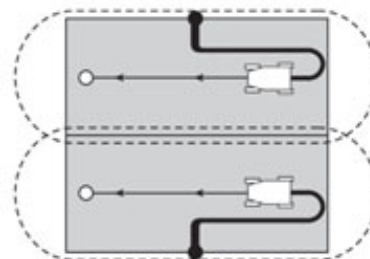

#### 35A-PJDA-TNT

Nozzles	bar	m	m <sup>3</sup> /h
10	2,1	12,8	0,89
	2,5	13,1	0,97
	3,0	13,4	1,05
	3,5	13,7	1,13
	4,0	14,0	1,21
12	4,1	14,0	1,23
	2,1	13,4	1,25
	2,5	13,9	1,37
	3,0	14,5	1,50
	3,5	15,0	1,63
4,0	15,5	1,75	
	4,1	15,6	1,77

